

1

M

*	HCMXB-2RS485-BD	V1.00	0.15W	RS485 Modbus RTU/ASCII

M

M

1.1

1.1.1

--	--

--	--

--	--

1.1.2


	
☐	
☐	
☐	RUN STOP

	
☐	
☐	*
☐	
☐	

	
☐	

	
☐	

2.2.2

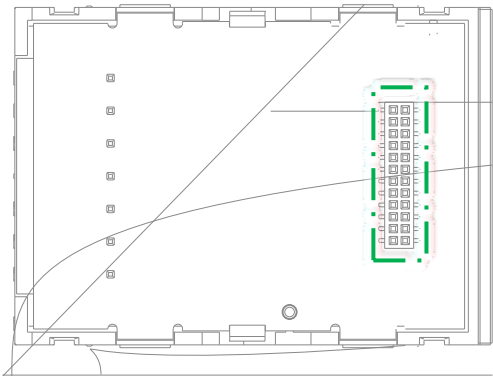


3 HCMXB-2RS485-BD

2 HCMXB-2RS485-BD

24PIN	

2.2.3



4 HCMXB-2RS485-BD

3


		RS485
		RS485
		RS485

2.2.4

4

		RS485	1.
			2. COM
			3.
			4.

2.3

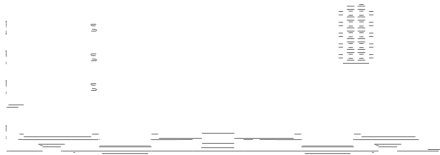

5 HCMXB-2RS485-BD

mm

3

3.1

g	15	
mm	18.6 (W) *51.1 (H)*36.1 (D)	
		0~50
		-25~75
		5~95%RH
		5~95% RH
		1m 2
		5 ~150 Hz
		3.5mm
		1.0g
		3
		± 4kV, ± 8kV
		± 2kV 5~100kHz
		± 2kV 5~100kHz
		- ± 500V -PE ± 500V
		15g 11ms 3
	/	2000 m (80kPa)
		IP20
		PPE

3.2

	DC 5V DC4.75V DC5.25V
	25 mA DC 5V

3.3

	2
	RS485
	COM Modbus

	RTU/ASCII
	32
	120Ω
	9600 bps 19200 bps 38400 bps 57600 bps 115200 bps
	7 8 8
	1
	1 2

4

4.1

4.1.1

- 1


PLC

35MM
- 2





PLC

PLC
- 3

10mm

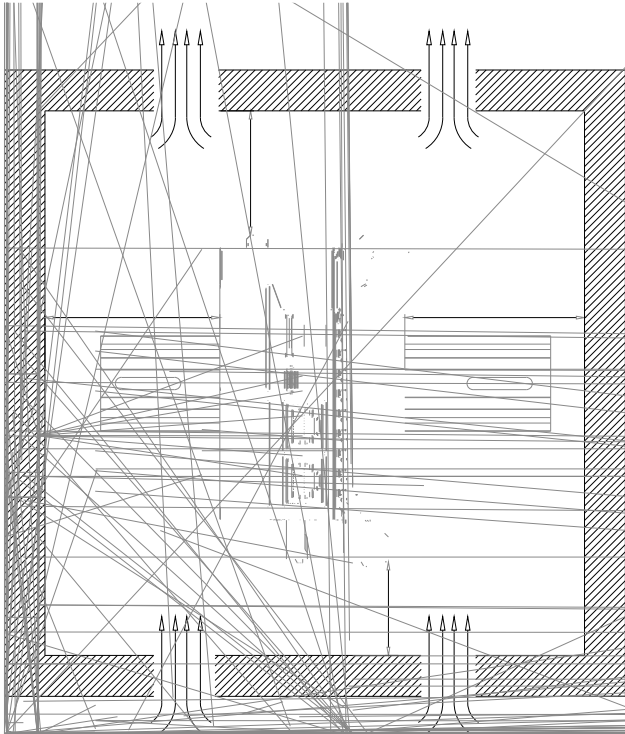


4.1.2

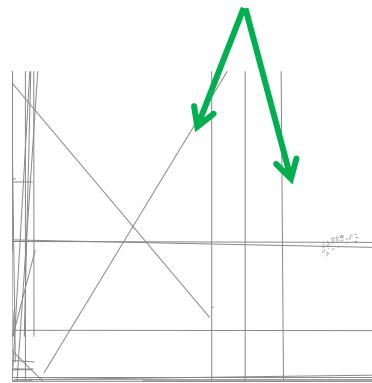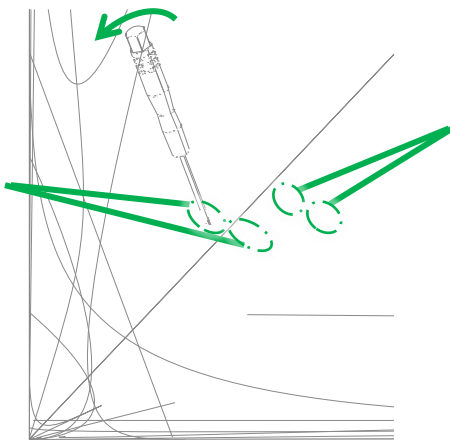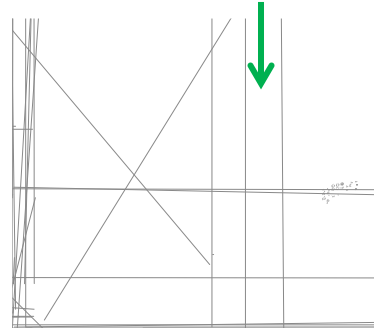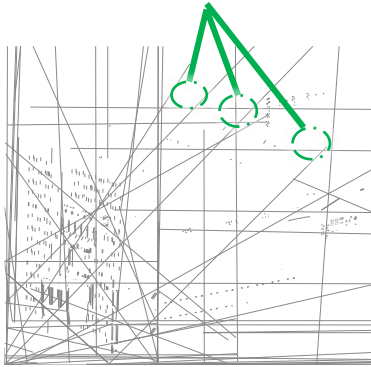


4.1.3


7PIN



7PIN



4.1.4

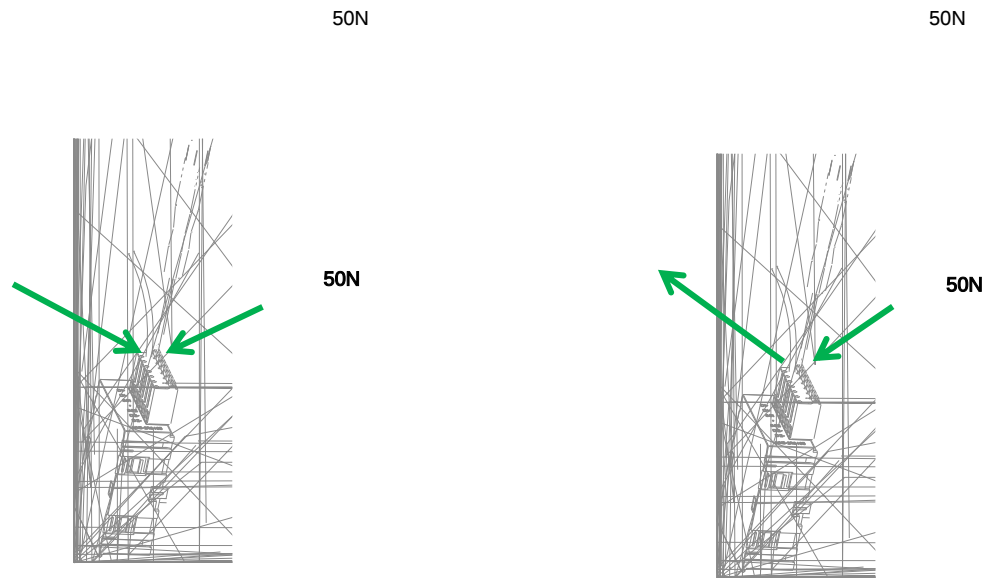



4.2

4.2.1

PIN	50N
mm ² /AWG	0.2~1.5/28~16
mm /	3.5Pitch=7P
mm	9~10
	-40~+105
	≤ 95%RH +40
RoHS	
➤	

4.2.2

RS485

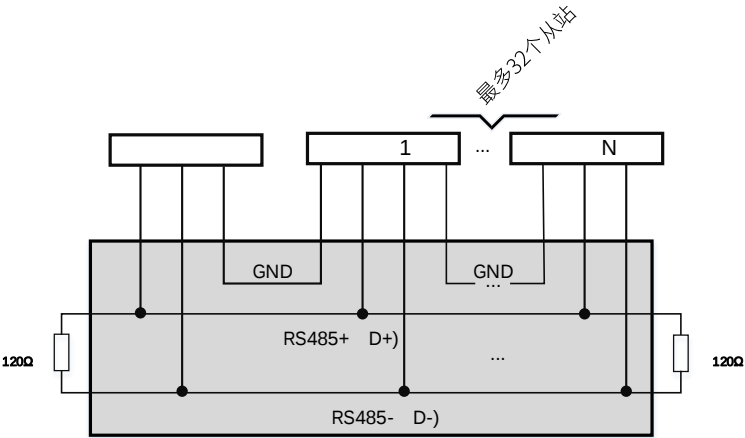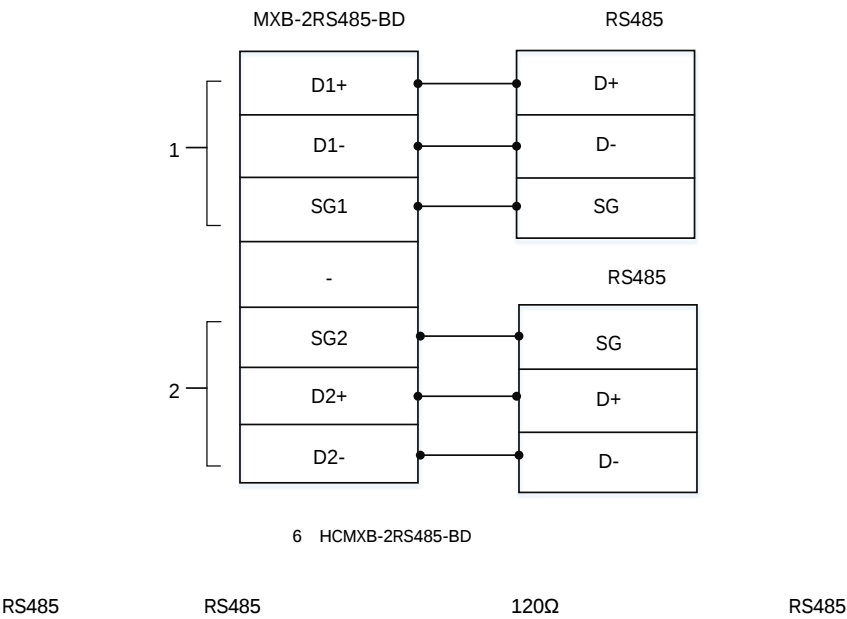


7 HCMXB-2RS485-BD

➤	1.	RS485	120Ω	1/4
	2.			
	3.	RS485		

5 RS485

HCM511S

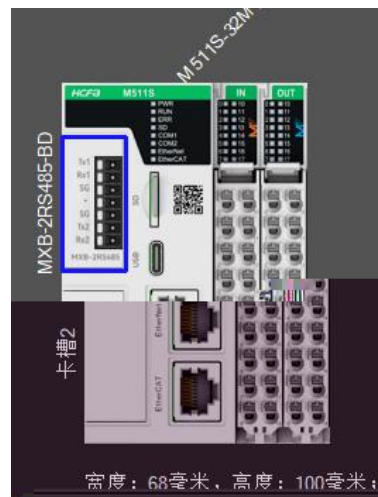

COM11 (RS485)	COM12 (RS485)
站号: 1	站号: 1
波特率: 9600bps	波特率: 9600bps
协议: (7, E, 1) ASCII	协议: (7, E, 1) ASCII
主从模式: 从站	主从模式: 从站
延迟时间: 3	延迟时间: 3

注: 延迟时间是指COM口在任何一次数据发送之前的等待时间; 当设置COM为主站模式后, 您可以到工程的[网络设置]树项下配置Modbus数据交换网络。

HCMXB-2RS485-BD

COM


1112

1

1~255

9600bps

7,E,1ASCII

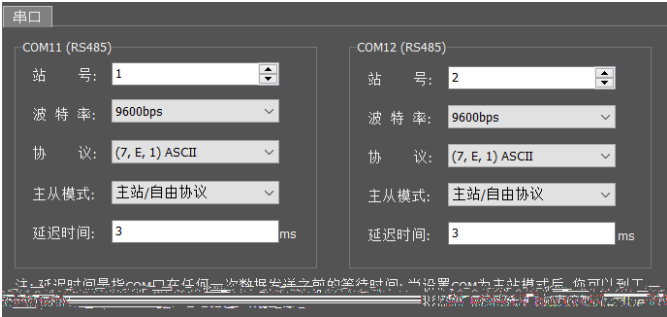

>

EON

4

